



FDR: F Drywall Reveal

- **Custom Sizes Available, Contact Customer Service** For Details
- Available With 1/8", 1/4" Vent Holes or No Vent
- **Available Curved Upon Request**
- Available in Aluminum (A), Copper (C), Galvanized Steel (GS), Bonderized (BN), Galvalume® (GVM), Stainless Steel (SS) or Zinc (Z)

Drywall reveal molding used at ceiling/wall, wall/ceiling, or base conditions. Can be vented to provide perimeter air flow. Tapes in after drywall is installed. Includes key holes for drywall mud adhesion.

Most Common Sizes

X Sizes: 1/2" or 5/8"

Y Sizes: 1/2", 3/4", 1", 1 1/2", 2", 2 1/2", 3", 3 1/2" or 4"

Length: 120"

Materials And Finishes:

Details: stpro.us/MET

Aluminum (A), Copper (C), Galvanized Steel (GS), Bonderized (BN), Galvalume® (GVM), Stainless Steel (SS)

or Zinc (Z)

ASTM Codes:

FDR058 034

Details: stpro.us/ASTM

All Accessories are fabricated from prime galvanized steel G90 zinc coating by the hot dipped method, conforming to steel and coating specification ASTM A-653/A-653M or zinc alloy meeting ASTM B-69. Stainless Steel A480/A480M A580M (Stainless Steel) For installation and placement instructions refer to ASTM C1063, C841 and C926.


Most Common Part Numbers:


FDR012V200 FDR: X=1/2, 1/4 Vent, Y=2, GS, 10' FDR: X=5/8, Y=1/2, SS, 10' FDR058 012SS


FDR: X=5/8, Y=1 1/2, Clear Anodize, A, 10 FDR058 100AC

FDR: X=5/8, Y=3/4, GS, 10'

FDR: X=5/8, Y=1 1/2, GS, 10th FDR058 112 FDR: X=5/8, 1/8 Vent, Y=2, GS, 10' FDR058V200 FDR058V400 FDR: X=5/8, 1/8 Vent, Y=4, GS, 10'



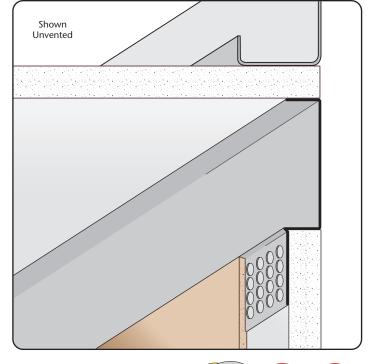



CAN BE CURVED		A
	SPECS	CAD

	Company:	QTY:	PO Number:
ш	Name:	Material/Gauge:	Job/Project:
	Address:	X Size:	Notes:
0	City:	Y Size:	
	State/ZIP:	Length:	
0	Phone:	Vent Holes: ☐ None ☐ 1/8" ☐ 1/4"	
	eMail:		

