



Finish-Rite

New

SFC88: Short Flange Casing Bead

- **Perfect Finished Product**
- No More Cracking, Delamination, Warranty Issues or Excessive Buildup
- Saves Labor and Material
- **Custom Sizes Available, Contact Customer Service**
- Available in Galvanized Steel (GS), Galvalume® (GVM) or Aluminum (A)

The latest addition to our new "Finish Rite®" line of plaster trims, the SFC88 Short Flange casing bead solves the problem of controlling the brown coat thickness in a 3 and 4 coat system to exactly the 3/4" depth required by providing a special screed leg at this depth. 1/8" key holes provide good keying of the brown coat to the trim to help prevent separation cracking and delamination. The SFC88 Short Flange saves time, material costs and increases production rates not to mention a crack-free finish.

Patent Pending

Most Common Sizes

W Sizes: 1/8" or 3/16" **X Sizes:** 7/8" or 1" **Y Sizes:** 1 3/4" **Z Sizes:** 3/4" Length: 120"

Materials And Finishes:

Details: stpro.us/MET

Galvanized Steel (GS), Galvalume® (GVM) or Aluminum (A)


ASTM Codes:

Details: stpro.us/ASTM

All Accessories are fabricated from prime galvanized steel G90 zinc coating by the hot dipped method, conforming to steel and coating specification ASTM A-653/A-653M or zinc alloy meeting ASTM B-69. Stainless Steel A480/A480M A580M (Stainless Steel) For installation and placement instructions refer to ASTM C1063, C841 and C926.



SFC88 018K078 134 034 88: W=1/8, X=7/8, Y=1 3/4, Z= 3/4, GS, 10¹

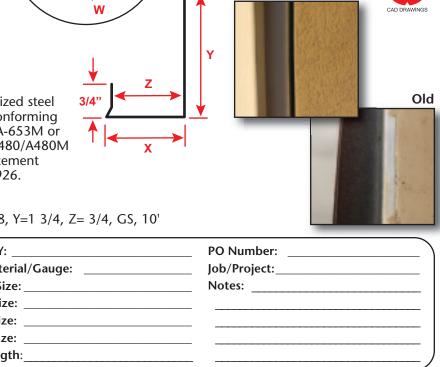

QTY:	PO Number:
	Job/Project:
Y Size:	
Z Size:	
Length:	
	Material/Gauge: W Size: X Size: Y Size: Z Size:

