



GRS: 4" Roll Stripping

- Galvanized Welded Wire, Not Woven

An all-purpose interior or exterior plaster or stucco reinforcement used over a variety of substrates such as drywall, plywood, OSB, foam board systems, etc. and wherever special "stretch" characteristics are beneficial. Excellent as an overwrap for chicken wire seams. GRS comes as a bundle of 4 rolls, each 250 ft long.


Per Bundle

Total Feet: 1,000'

Pieces: 4


Length: 250'

NOTE: GRS is made from a thinner wire (18 1/2 gauge) than the other Stockton Products' wire to enable stretchability.

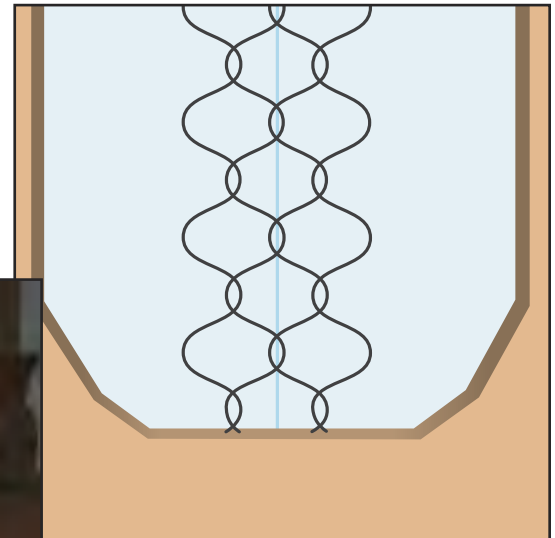

Most Common Part Numbers:

GRS 4" Roll Stripping: GS 18.5ga, 1000'

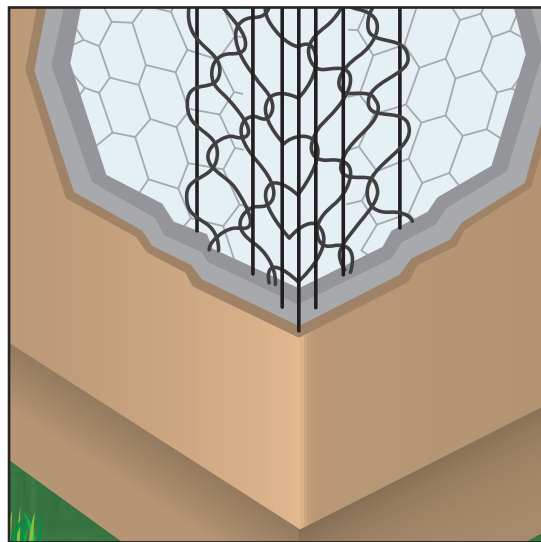

LF: Long Flange

- Available in Galvanized or Stainless Steel


Designed for extra thick fireproofing. This product is engineered for exterior or interior reinforcing with up to 2 3/8" fireproofing material. It has 3 1/4" legs. Available in stainless steel to be used with absolute confidence in high humidity and salt air environments. Extra nose wires provide increased structural rigidity. Can be used with irregular framing.

Per Carton

Total Feet: 250'

Pieces: 25

Length: 10'

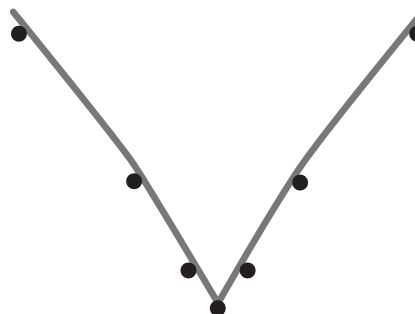

Most Common Part Numbers:

10LF Long Flange: GS, 10'

10SSLF Long Flange: SS, 10'