



CUSTOM SIZES AVAILABLE!

Stockton Custom Fabrication

877-786-2587

custom@StocktonProducts.com



PRODUCTS™

NVS: Narrow V Screed

- Custom Sizes Available, Contact Customer Service For Details
- Available With 1/8" Key Holes or No Holes
- Available in Aluminum (A), Copper (C), Galvanized Steel (GS), Bonderized (BN), Galvalume® (GVM), Stainless Steel (SS) or Zinc (Z)

A control joint with a minimal reveal. Available with key holes in the nailing flange for better plaster adhesion.

Most Common Sizes

X Sizes: 1/2", 5/8", 3/4", 7/8" or 1 3/4

Y Sizes: 1/4" or 3/8"

Length: 120"

Materials And Finishes:

Details: stpro.us/MET

Aluminum (A), Copper (C), Galvanized Steel (GS), Bonderized (BN), Galvalume® (GVM), Stainless Steel (SS) or Zinc (Z)

ASTM Codes:

Details: stpro.us/ASTM

All Accessories are fabricated from prime galvanized steel G90 zinc coating by the hot dipped method, conforming to steel and coating specification ASTM A-653/A-653M or zinc alloy meeting ASTM B-69. Stainless Steel A480/A480M A580M (Stainless Steel) For installation and placement instructions refer to ASTM C1063, C841 and C926.


Most Common Part Numbers:

NVS034 014A NVS: X=3/4, Y=1/4, A, 10'


NVS034 014Z NVS: X=3/4, Y=1/4, Z, 10'

NVS078 014SS NVS: X=7/8, Y=1/4, SS, 10'

NVS134 014 NVS: X=1 3/4, Y=1/4, GS, 10'

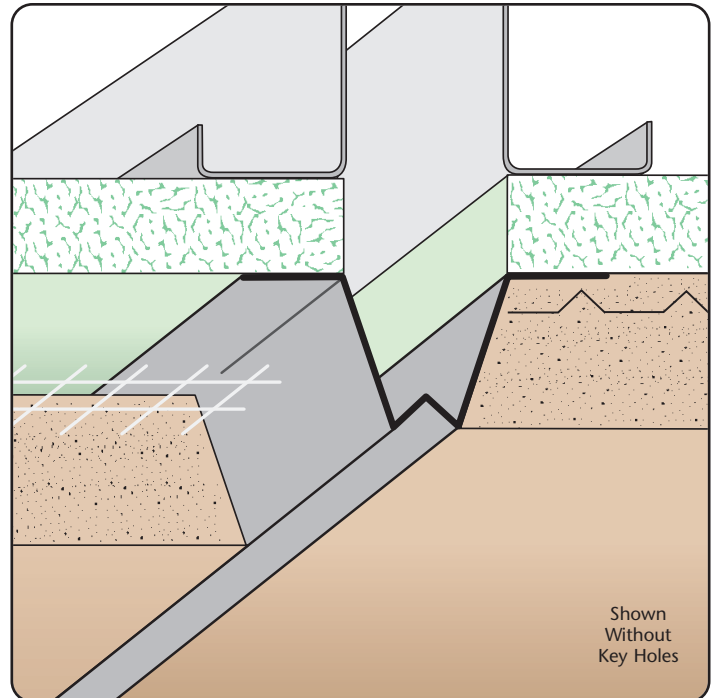

Shown Without Key Holes

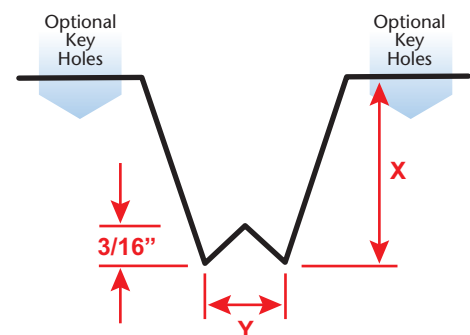

QUOTE

Company: _____
 Name: _____
 Address: _____
 City: _____
 State/ZIP: _____
 Phone: _____
 eMail: _____

QTY: _____
 Material/Gauge: _____
 X Size: _____
 Y Size: _____
 Length: _____
 Key Holes: None 1/8"

PO Number: _____
 Job/Project: _____
 Notes: _____

877-786-2587 • StocktonProducts.com

